

DIAMOND[E]MOTION CONTROLLER

LEVEL 1, 4 OUTPUTS, 1 READER

Article Number: MI-CON1-29L4-01D




Technical Data

Dimension (LxWxH)	175 x 90 x 30,5 (mm)
Input Voltage	12 V DC (External Power Supply)
Power Dissipation	5 W
Output Switching Capability	50 V DC / 2,5 A per Output / 6 A Total
Temperature Range	-10 oC to 50 oC
Controlled Outputs	1 x 4 Parallel
Element Sensor Input	4
Number of Reader Connectors / Groups	1
Alarm Outputs	1 Dry Contact (Alarm Option)
Alarm Inputs	1 Dry Contact (Alarm Option)
Power Supply Connector	4 Pin Phoenix
Input / Output / Door-Sensor Connector	4 x 6 Pin AMP
PC Interface (Optional)	RS232 - USB
CHIP Key Management (Optional)	3 Button Hand Terminal / 12 Button Hand Terminal
Settings Management (Optional)	12 Button Hard Terminal / DEMCON PC Software


Features

External Alarm Beeper Connection	YES
Emergency Opening Support	YES
Security Opening with Door Control	YES
Overload / Overvoltage Protection	YES
Network Functions	NO
Certifications	CE, FCC, ROHS


Stand Alone Configuration

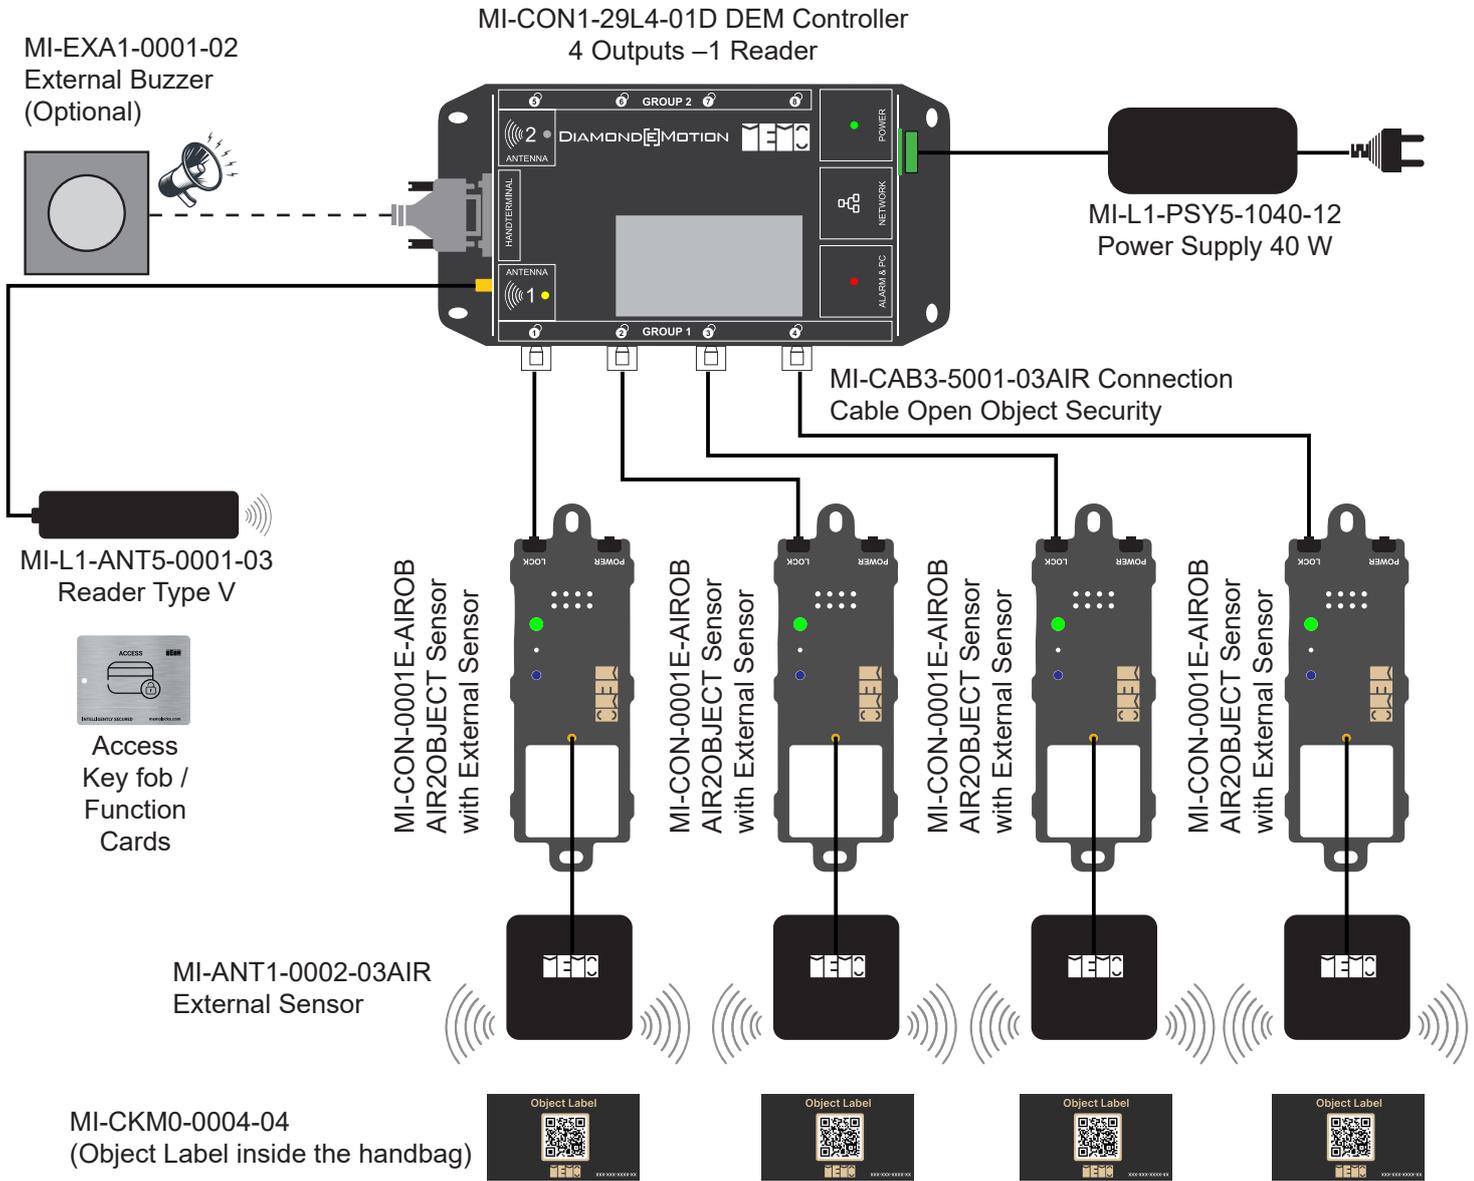





Dimensions

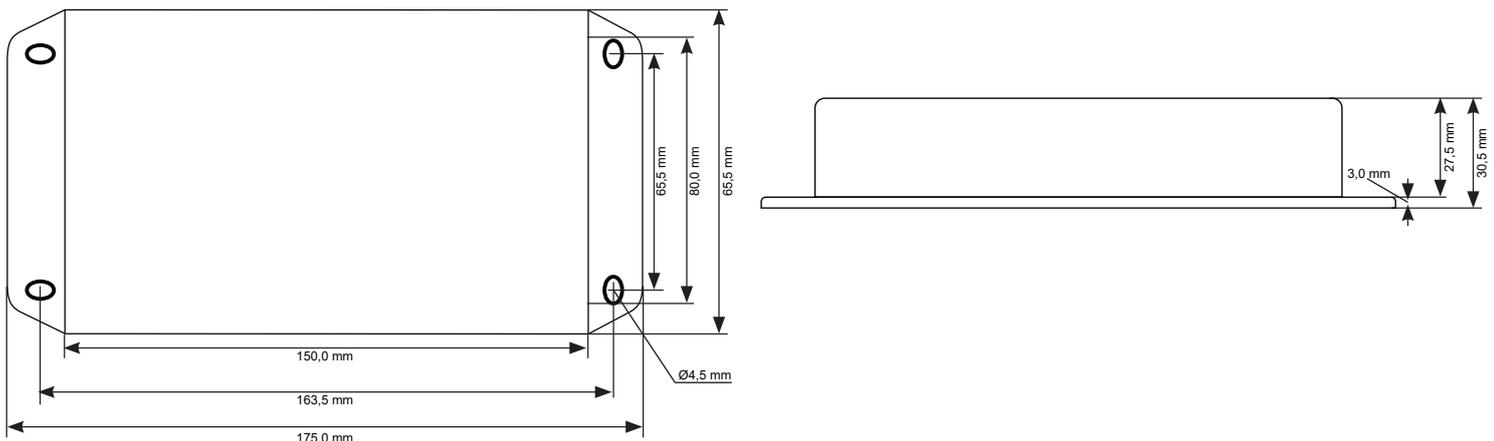

Connections Overview

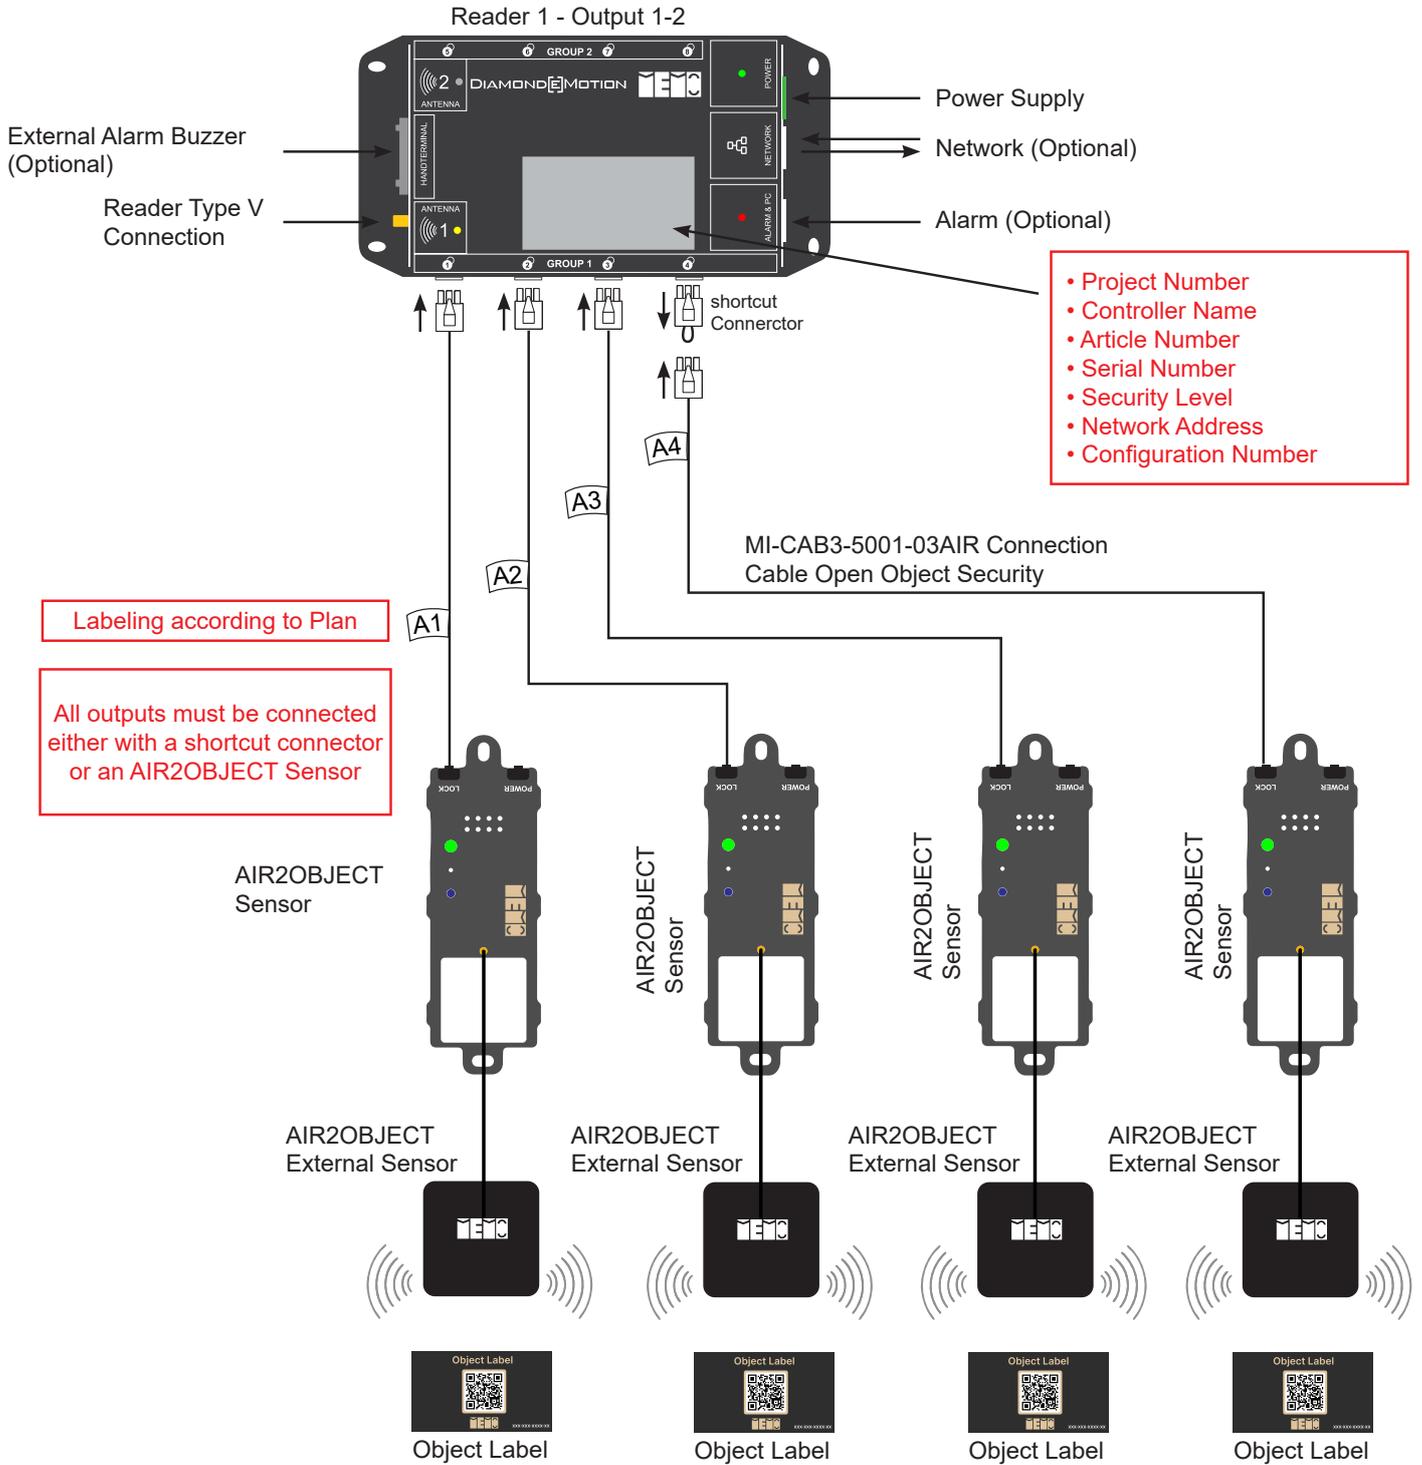

Mounting Recommendations

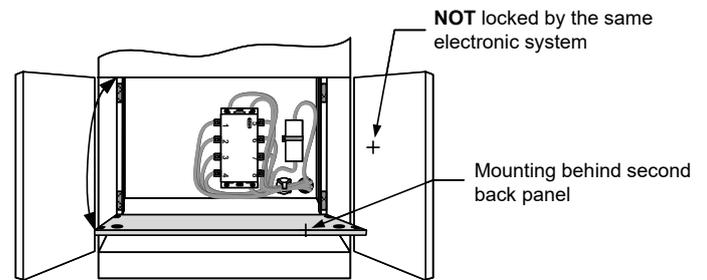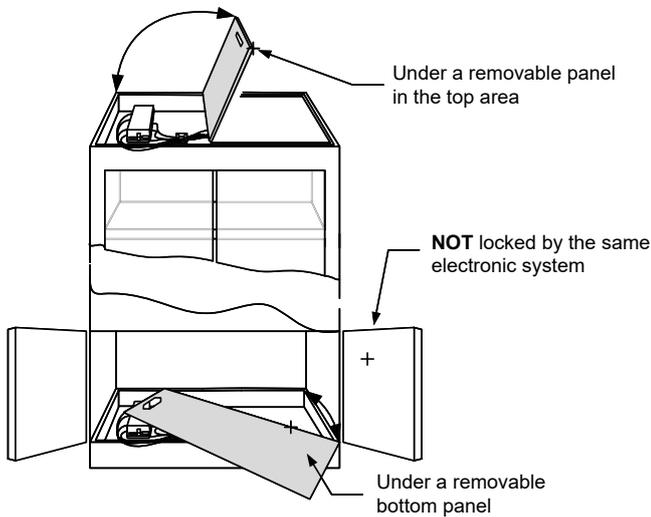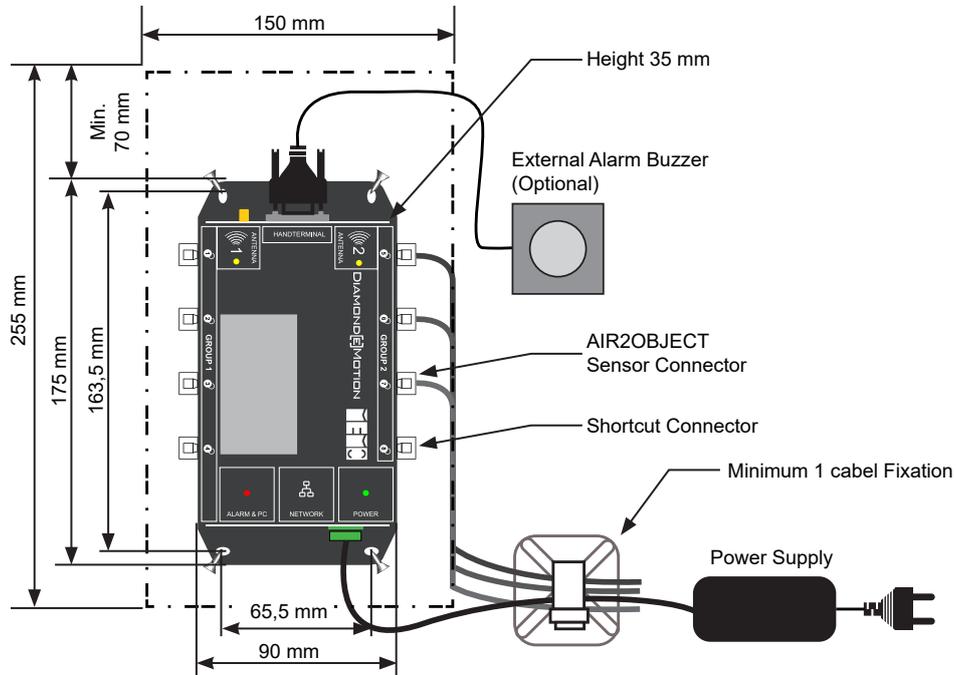

Mount orderly



Do **NOT** mount behind a door locked by the same electronic system



Do **NOT** overheat by other sources